


Analog amplifier modules

RE 29865/12.12
Replaces: 10.12

1/4

Types VT 11131 and VT 11132

Series 1X

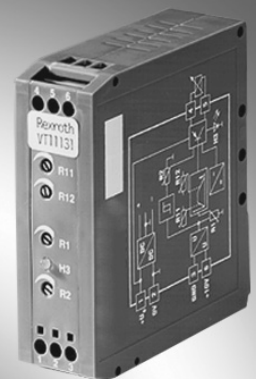

H3786

Table of contents

Contents	Page
Features	1
Ordering code	2
Functional description	2
Block circuit diagram / pin assignment	2
Technical data	3
Output characteristic curve	3
Terminal assignment	4
Unit dimensions	4
Engineering / maintenance notes / supplementary information	4

Features

- Suitable for controlling proportional pressure control valves without electrical position feedback
- Differential input
- One clocked output stage
- Function generator
- Ramp generator with adjustable ramp time (up and down ramp can be adjusted separately)
- Adjustable current regulator
- Reverse voltage protection for voltage supply
- Indication of solenoid energisation by LED (brightness of LED proportional to solenoid current)

Ordering code

VT 1113 - 1X / *

Amplifier modules for controlling proportional pressure control valves:

- Types (Z)DBE 6-1X, DBE(M) 10-3X, DBE(M) 10-5X, DBE(M) 20-3X, DBE(M) 20-5X and ZDRE 10-1X

= 1

- Type (Z)DRE 6-1X

= 2

Series 10 to 19

= 1X

(10 to 19: unchanged technical data and pin allocation)

Further details in clear text

Functional description

These amplifier modules are suitable for controlling a proportional solenoid. The amplifier modules are to be snapped onto carrier rails according to EN 60715. The electrical connections are made by means of screw terminals. The modules are operated using 24 V DC.


The solenoid current (actual value) is measured and compared with the externally provided command value. Any differences occurring between actual and command value, caused e.g. by changes in the solenoid temperature or operating voltage, are balanced.

The activation of solenoid control is indicated by LED "H3", the brightness of which is proportional to the solenoid current.

The following values can be adjusted from outside by means of assigned trimming potentiometers:

- Ramp time, separately for up and down ramp (by means of R11, R12 → t_{\max} approx. 5 s)
- Gradient of the output characteristic curve (by means of R1, R2)

Block circuit diagram / pin assignment

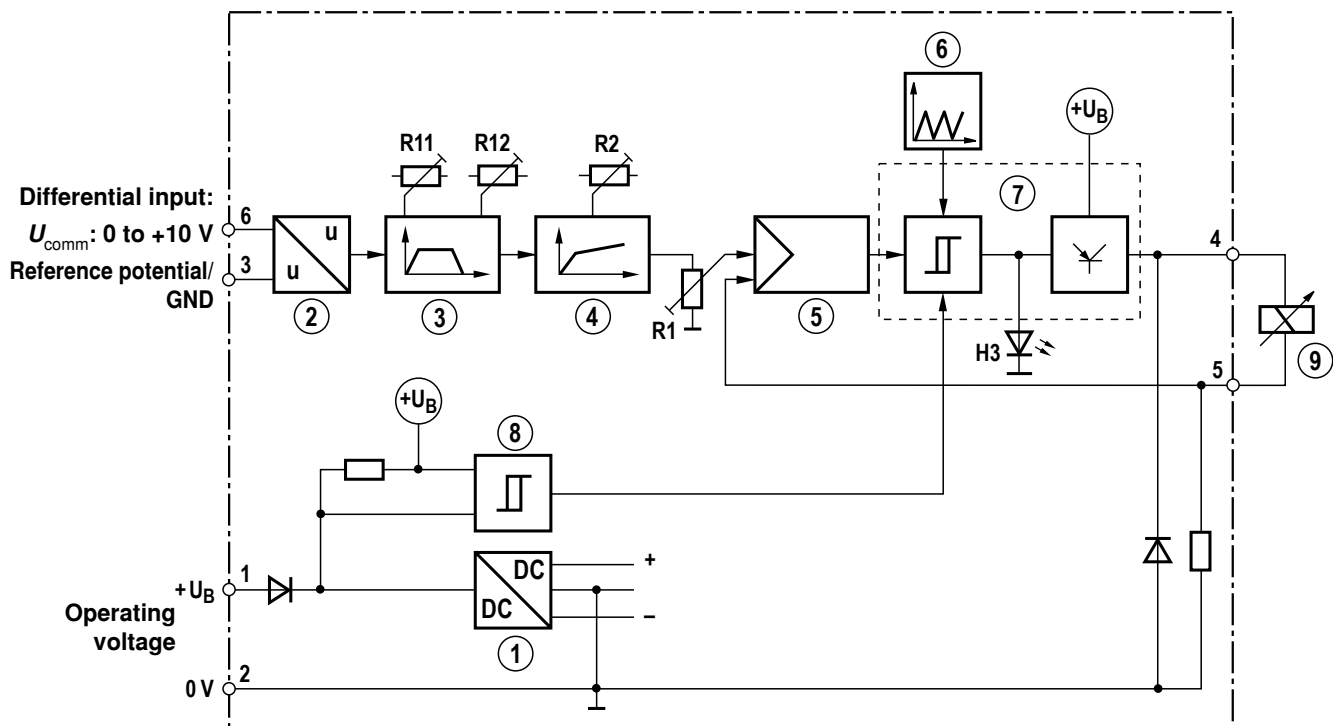

Technical data (for applications outside these parameters, please consult us!)

Operating voltage	U_O	24 VDC +40 % –10 %
Operating range:		
– Upper limit value	$u_B(t)_{\max}$	35 V
– Lower limit value	$u_B(t)_{\min}$	21 V
Power consumption	$P_{S \max}$	28 VA
Current consumption	I_{\max}	1.3 A
Fuse		Electronic short-circuit protection of the solenoid
Inputs:		
– Command value (differential input)	U_{comm}	0 to +10 V; R_i approx. 10 k Ω
Adjustment ranges:		
– Output current	I	$I_{10\%}$ to I_{\max}
– Ramp time	t	approx. 50 ms to approx. 5 s
Outputs:		
– Solenoid current / resistance		
• with VT 11131	I_{\max}	1.6 A; $R_{(20)} = 5.4 \Omega$
• with VT 11132	I_{\max}	1.6 A; $R_{(20)} = 5.4 \Omega$
– Clock-pulse frequency of output stage		
• with VT 11131	f	300 Hz ± 15 %
• with VT 11132	f	360 Hz ± 15 %
Type of connection		6 screw terminals
Type of mounting		Carrier rail TH 35/7.5 to EN 60715
Type of protection		IP 20 to EN 60529
Dimensions (W x H x D)		25 x 79 x 85.5 mm
Permissible operating temperature range	ϑ	0 to +50 °C
Storage temperature range	ϑ	–25 to +85 °C
Weight	m	0.13 kg

Note:

For details regarding **environment simulation tests** in the field of climate, see data sheet 30309-U (declaration on environmental compatibility).

Output characteristic curve

VT 11131 and VT 11132

